


RLC-101

Un-alarmed Single Beacon
Red Light Controller

WHERE ENGINEERING
MEETS PASSION.™

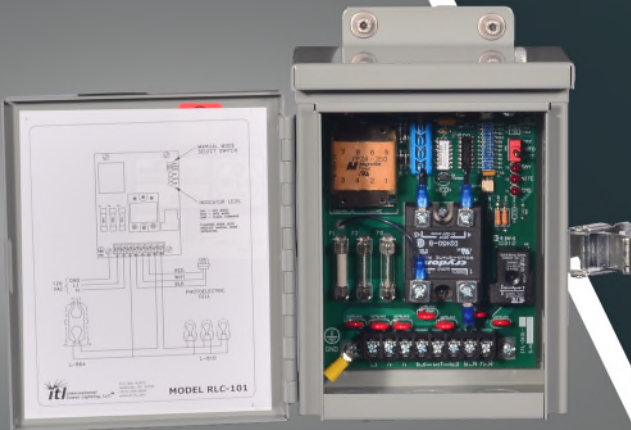

The **RLC-101 Red Light Controller** is capable of controlling **one FAA type L-864 red LED or FAA type L-864 incandescent beacon** and up to **five FAA type L-810(L) red LED or FAA type L-810 incandescent markers**.

The RLC-101 is a rugged, low cost, un-alarmed control **solution for type A-1 towers**.

Features

- Controls **one L-864 LED or incandescent beacon** and **up to five L-810 LED or incandescent markers**.
- Compact lockable NEMA 3R Enclosure (10 x 6.8 inches overall).
- Three pre-punched knockouts (1/2 inch - 1 inch).
- Manual mode control switch.
- Indicator lights for operating mode and flash command.
- Built-in fusing for beacon, markers, and photoelectric cell (PEC).
- 120 VAC and 230 VAC International versions available.

Specifications

Beacon:	One Incandescent Beacon: <ul style="list-style-type: none">- Two 620 W / 120 VAC bulbs or- Two 500 W / 230 VAC bulbs or One LED Beacon <ul style="list-style-type: none">- All manufacturers
Markers:	Up to Five LED or Incandescent markers <ul style="list-style-type: none">- (all manufacturers)
PEC:	120 / 230 VAC, 50 / 60 Hz
Suppression:	45 Joule, 275 V, Power, Beacon, Marker, PEC
Enclosure:	NEMA Type 3R, Lockable
Power:	120 / 230 VAC, 50/60 Hz, 6 VA <ul style="list-style-type: none">- (Lights not included)
Temperature:	-40°C to +55°C
Humidity:	Less than 95%, non-condensing
Weight:	5 lbs. (2.3 kg)

